MODEL

2AM-FCC-1
(4 Vanes, CCW Rotation)

2AM-FCW-13
(4 Vanes, CW Rotation)

Net wt. 7 lbs. (3,2 kg)

FEATURES
- Foot mounting
- Any plane operation
- Metal muffler AC980 adds 2" height when installed

RECOMMENDED
- Filter AH103F
- Regulator AH104R
- Gauge AA806
- Lubricator AH105L
- Oil AD220 – 1 quart (.94 litres)
- Repair kit K202 (Single Rotation)

inches / mm

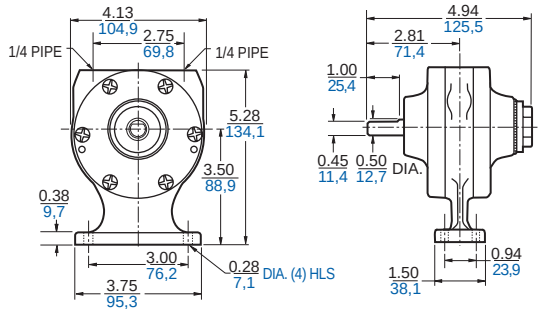

2AM-NCC-16
(4 Vanes, CCW Rotation)

2AM-NCW-7B
(4 Vanes, CW Rotation)

2AM-NRV-89
(4 Vanes, Reversible)

Net wt. 6 lbs. (2,7 kg)

FEATURES
- Hub mounting
- Any plane operation
- Metal muffler AC980 adds 2" height when installed

RECOMMENDED
- Filter AH103F
- Regulator AH104R
- Gauge AA806
- Lubricator AH105L
- Oil AD220 – 1 quart (.94 litres)
- Repair kit K202 (Single Rotation)
- Repair kit K509 (Reversible)

inches / mm

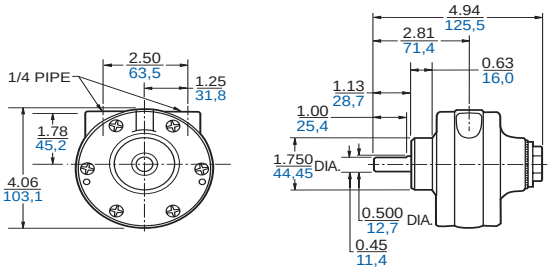

2AM-NCC-43A
(4 Vanes, CCW Rotation)

2AM-NRV-90
(4 Vanes, Reversible)

Net wt. 15 lbs. (6,8 kg)

FEATURES
- NEMA 56C mounting
- Any plane operation
- Metal muffler AC980 adds 2" height when installed

RECOMMENDED
- Filter AH103F
- Regulator AH104R
- Gauge AA806
- Lubricator AH105L
- Oil AD220 – 1 quart (.94 litres)
- Repair kit K203A (Single Rotation)
- Repair kit K510 (Reversible)

inches / mm

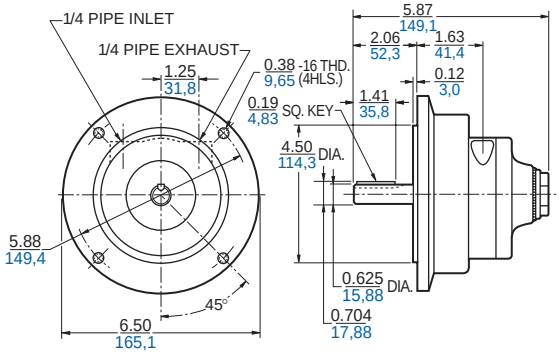

MODEL

2AM-ACC-88
(4 Vanes, CCW Rotation)
Flange Mount

2AM-ACC-91
(4 Vanes, CCW Rotation)
Face Mount

2AM-ARV-92
(4 Vanes, Reversible)
Flange Mount

2AM-ARV-93
(4 Vanes, Reversible)
Face Mount

FEATURES

- IEC #72 mounting frame size:
  D71 (2AM-ACC-88, 2AM-ARV-92)
  D71C (2AM-ACC-91, 2AM-ARV-93)
- Any plane operation
- Muffler AL445

RECOMMENDED

- Repair kit K203A (Single Rotation)
- Repair kit K510 (Reversible)

Delivers up to 0,56 kW (3/4 hp). Speeds may be varied from 300 to 3,000 rpm. Max. recommended operating pressure 7 bar (100 psi).

Models 2AM-ACC-88/2AM-ARV-92

inches / mm

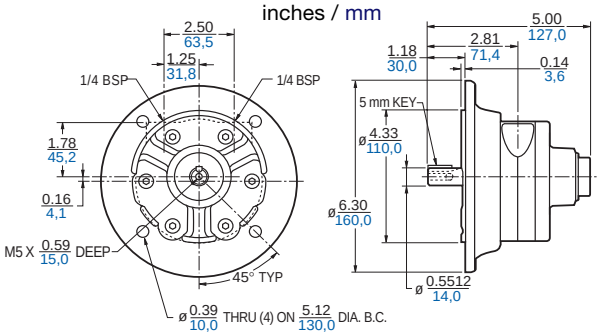

Models 2AM-ACC-91/2AM-ARV-93

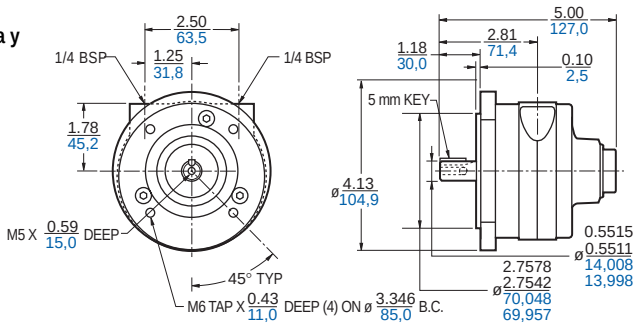

Output Power vs. Speed

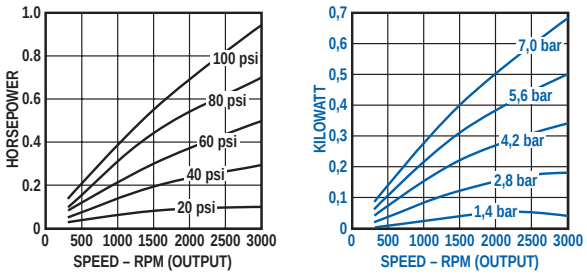

Torque vs. Speed

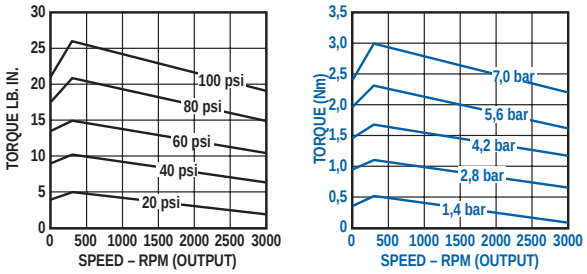

Air Consumption vs. Speed